

Cable Trunking / Pre Galvanised / Accessories / Spare Trunking Cover / Page 1 of 4

Speedlock Cover



British Standard:

BS EN 50085-1:2005
BS EN 50085-2-1:2006
VDE Testing and Certification Institute
Test Certificate No. 40040200*

Material Specification:

British Standard: BS EN 10346:2015.

Finish:

Pre Galvanised

Screwfix/Tamperproof Cover



Ordering Information:

- Please refer to the following pages or alternatively visit our website below:

<http://www.trenchltd.com>

Packing Detail: Speedlock

- 1 x 3m cover c/w 6 fitted turnbuckles


Packing Detail: Screwfix

- 1 x 3m cover c/w 8 x M5 Black Spring Clips, 8 x M5 x10 pozi pan screws-supp loose


Packing Detail: Tamperproof

- 1 x 3m cover c/w 8xM5 Black Spring Clips, 8xM5x8 T25 Resistorx Screws-supp loose

Screwfix Lid Kit



Tamperproof Lid Kit



Other Options Available:

- Powder Coated
- IP4X
- Alternative Width/Depth/Material Thickness/Length (<3m)
- Plain (no holes)

* See Technical Data Sheet / Cable Trunking / Pre Galvanised / Lengths / Test Results for Test Data

Cable Trunking / Pre Galvanised / Accessories / Spare Trunking Cover / Ordering Information / Page 2 of 4

For Trunking Lid selection please refer to our Data Sheet Cable Trunking Page 3 of 6 to determine lid options available by trunking widths/heights of our trunking range

Standard Speedlock

Use the codes in the table on page 3 - please note covers are suitable for both single & multi compartment trunking. For example if you require a speedlock cover to suit 100mm wide x 50mm high trunking single/ twin or multi compartment the correct code would be **ST4SLC**.

Screwfix Cover

Use the codes in the table on page 3 and substitute SLC with **SFC** - please note covers are suitable for both single & multi compartment trunking. For example if you require a screwfix cover to suit 100mm wide x 50mm high trunking single/ twin or multi compartment the correct code would be **ST4SFC**.

Tamperproof Cover

Use the codes as above for screwfix and suffix with **-SEC**. Please note covers are suitable for both single & multi compartment trunking. For example if you require a screwfix cover to suit 100mm wide x 50mm high trunking single/ twin or multi compartment the correct code would be **ST4SFC-SEC**.

Standard speedlock trunking body will not accept this lid the return flange on the body of speedlock differs from screwfix/tamperproof type please contact our sales office for more information.

Powder Coated

Please ensure that when requesting a quotation for powder coated products that you have the correct quantities, RAL number and finish (i.e. matt or gloss) in order for us to quote accordingly.

Please note product codes for powder coated items are Non-Standard, however, dimensions & weights on page 3 are still applicable.

IP4X

To achieve IP4X add to each join 1 x Lid Fix Bar - please follow the link below for ordering instructions.

<http://www.trenchltd.com/cable-trunking/ip4x-accessories/>


For Trunking Lid selection please refer to our Data Sheet Cable Trunking Page 3 of 6 to determine lid options available by trunking widths/heights of our trunking range

Product Code Standard	Dim A (mm) To Suit Width	Length (M)	Dim C (mm)	Dim D (mm)	Weight (kg)
ST2SLC	50	3	N/A	N/A	1.58
ST3SLC	75	3	N/A	N/A	2.11
ST4SLC	100	3	N/A	N/A	2.64
ST6SLC	150	3	N/A	N/A	3.70
ST8SLC	200	3	N/A	N/A	6.07
ST9SLC	225	3	N/A	N/A	6.75
ST12SLC	300	3	N/A	N/A	8.78
ST2SFC	50	3	N/A	N/A	1.57
ST3SFC	75	3	N/A	N/A	2.10
ST4SFC	100	3	N/A	N/A	2.63
ST6SFC	150	3	N/A	N/A	3.69
ST8SFC	200	3	N/A	N/A	6.06
ST9SFC	225	3	N/A	N/A	6.74
ST12SFC	300	3	N/A	N/A	8.77
ST2SFC-SEC	50	3	N/A	N/A	1.57
ST3SFC-SEC	75	3	N/A	N/A	2.10
ST4SFC-SEC	100	3	N/A	N/A	2.63
ST6SFC-SEC	150	3	N/A	N/A	3.69
ST8SFC-SEC	200	3	N/A	N/A	6.06
ST9SFC-SEC	225	3	N/A	N/A	6.74
ST12SFC-SEC	300	3	N/A	N/A	8.77
Approximate weights shown are a nominal value due to material thickness and tolerance and includes stop end & fixings where applicable. See Page 2 for IP4X & Powder Coating Information.					

Cable Trunking / Pre Galvanised / Accessories / Trunking Cover / Fixing Positions / Page 4 of 4

If cable trunking is cut to length then on site drilling will be required. Please see below guides for assistance. Please note all dimensions are in mm.


Lid Dimensions for Speedlock

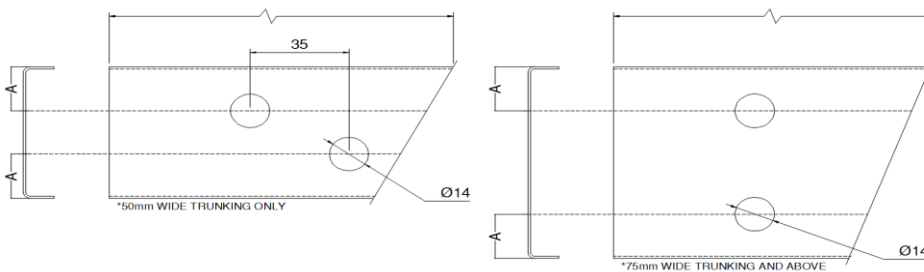

Trunking Width (mm)	Dim A (mm) External
50	18.5
75	18.5
100	18.5
150	18.5
200	23.5
225	23.5
300	23.5

- Speedlock spare turnbuckle code : SASLF (PK 10)

Lid Dimensions for Screwfix & Tamperproof

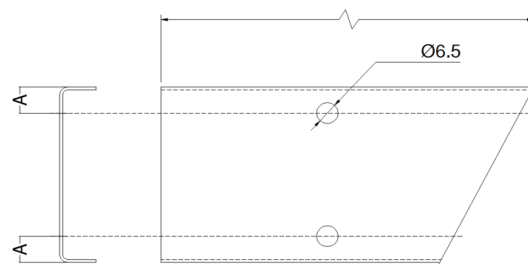

Trunking Width (mm)	Dim A (mm) External
50	8.5
75	8.5
100	8.5
150	8.5
200	8.5
225	8.5
300	8.5

- Screwfix spare lid fixings code: LIDFIXKIT (8x M5 Black Spring Clips & 8 x M5x10 Pozi pan screws - supp loose)
- Tamperproof spare lid fixings code: TPLIDFIXKIT (8x M5 Black Spring Clips & 8 x M5x8 T25 Resistorx screws - supp loose)